

Cut-Off Guide By Opponent System Type

IMPORTANT:

The Cut-Off kit comes with cables for each cut-off application. The cables are labeled at the connection ends to help identify them.

X2 is the Home Team

X2 as HomeTeam vs X2, Cobalt Plus, ProCom, or C2P Communications System Visiting Team

1. Attach the Cutoff Switch to the RJ45 Ethercon of the Switch Cable labeled “Switch or GSC.”
2. Plug the 4-Pin Female XLR (labeled “Y-Cable or Pack”) from the Switch Cable to the 4-Pin Male XLR end of the Y-Cable.
3. Plug the 4-Pin Female XLR ends of the Y-Cable into the Home system and Visitor system cutoff packs. Either 4-Pin XLR connector can plug into Cobalt Plus, X-System, C2P Communications, or ProCom for cutoff. Some packs, such as Cobalt Plus and ProCom, require a supplied adapter cable from the Y-Cable to the pack.

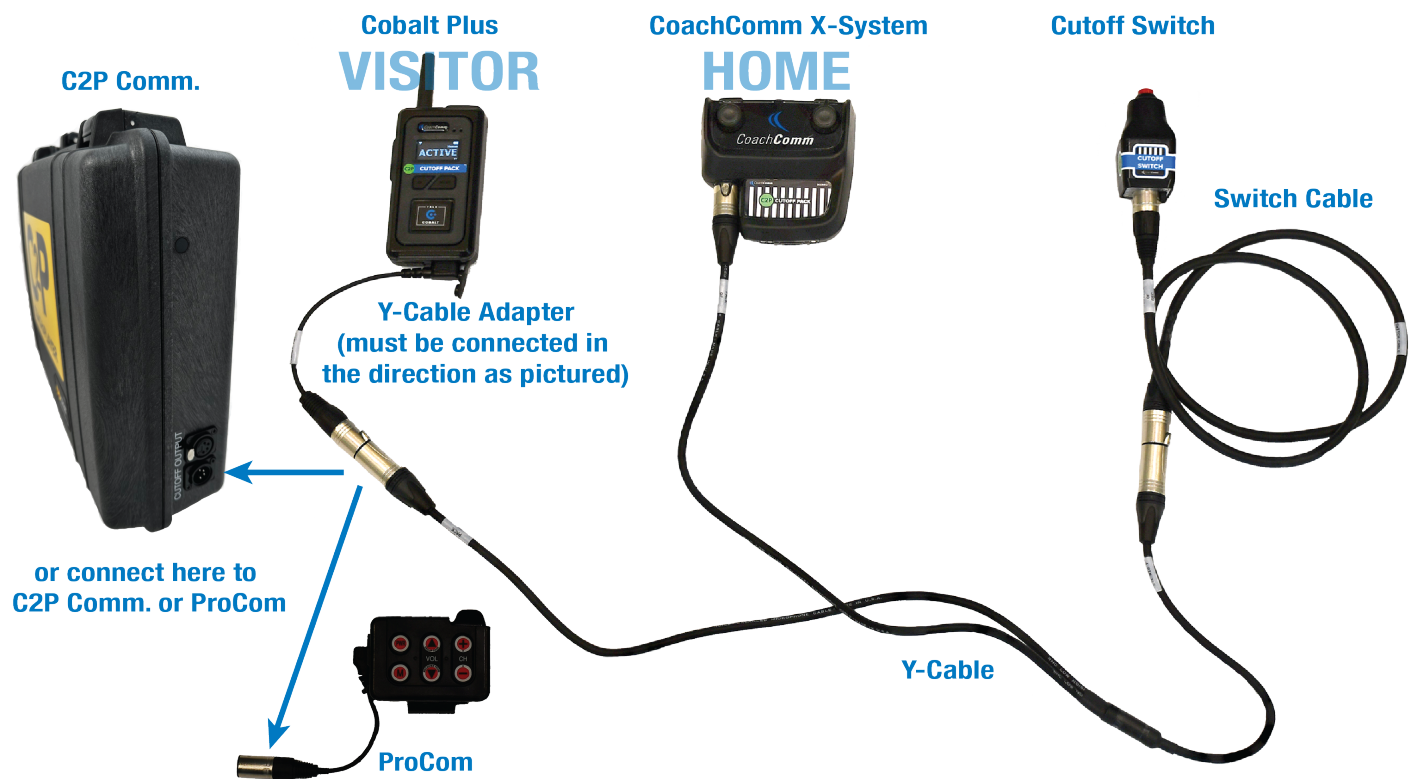


Diagram 1

X2 Home vs GSC Visiting Team

1. Connect the RJ45 Ethercon on the Y-Cable labeled "Switch" to the Cutoff switch.
2. Connect the 4-Pin Female XLR on the Y-Cable to the X2 Radio Pack.
3. Connect the RJ45 Ethercon on the Y-Cable labeled "GSC IN" into the cutoff port on the GSC system.

Note: Separate CoachComm Radio Pack from the GSC Rack and Antennas by at least 10 feet.

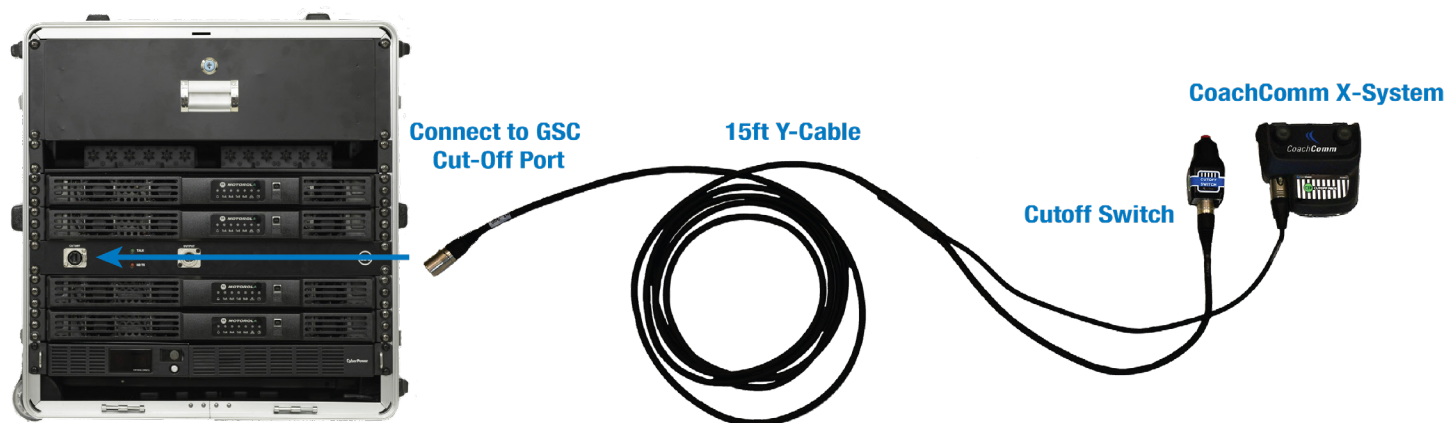


Diagram 2

X2 is the Visiting Team

X2 Visiting a ProCom Team

ProCom is controlling cut-off as the home team:

1. Connect the 4-Pin Female XLR on the ProCom's Y-Cable to the 4-Pin Male to 4-Pin Male XLR Adapter.
2. Connect the 4-Pin Male to 4-Pin Male XLR Adapter to the 4-Pin Female XLR on the In-Line Adapter.
3. Connect the RJ45 Ethercon on the In-Line Adapter to the RJ45 Ethercon on the Switch Cable labeled "Switch or GSC."
4. Connect the 4-Pin Female XLR (labeled "Y-Cable or Pack") on the Switch Cable to a Radio Pack (w/Referee Profile).

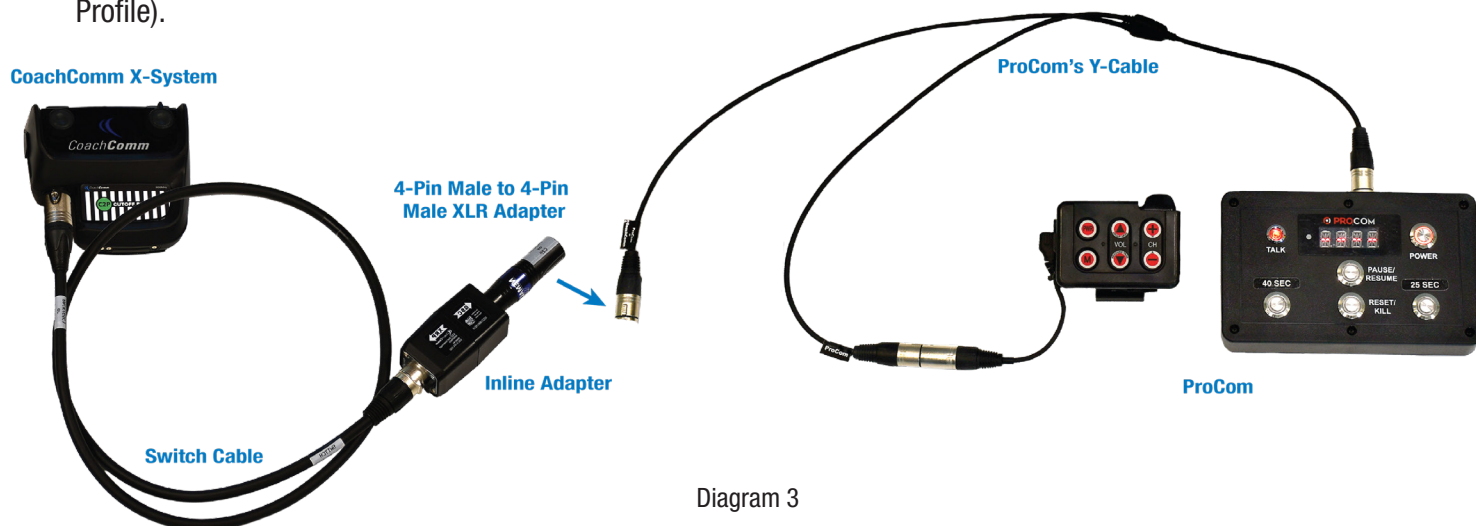


Diagram 3

X2 Visiting a C2P Communications Team

C2P Communications is controlling cut-off as the home team:

1. Connect the 4-Pin Male to 4-Pin Male XLR Adapter to the 4-Pin Female XLR on the In-Line Adapter.
2. Connect the RJ45 Ethercon on the In-Line Adapter to the RJ45 Ethercon on the Switch Cable labeled "Switch or GSC."
3. Connect the 4-Pin Female XLR (labeled "Y-Cable or Pack") from the Switch Cable to a Radio Pack (w/Referee Profile).
4. Connect the 4-Pin Male to 4-Pin Male XLR Adapter to the 4-Pin Female XLR labeled "Output" on the side of the C2P Communications case.



Diagram 4

X2 Visiting a GSC Team

When GSC is controlling cut-off as the home team:

1. Connect the 4-Pin Female XLR on the Extender cable to the 4-Pin Male XLR labeled "OUTPUT" on the GSC Panel.
2. Connect the 4-Pin Male XLR on the Extender cable to the 4-Pin Female XLR on the In-Line Adapter.
3. Connect the RJ45 Ethercon on the In-Line Adapter to the RJ45 Ethercon on the Switch Cable labeled "Switch or GSC."
4. Connect the 4-Pin Female XLR (labeled "Y-Cable or Pack") on the Switch Cable to a Radio Pack (w/Referee Profile).

Note: Separate CoachComm Radio Pack from the GSC Rack and Antennas by at least 10 feet.

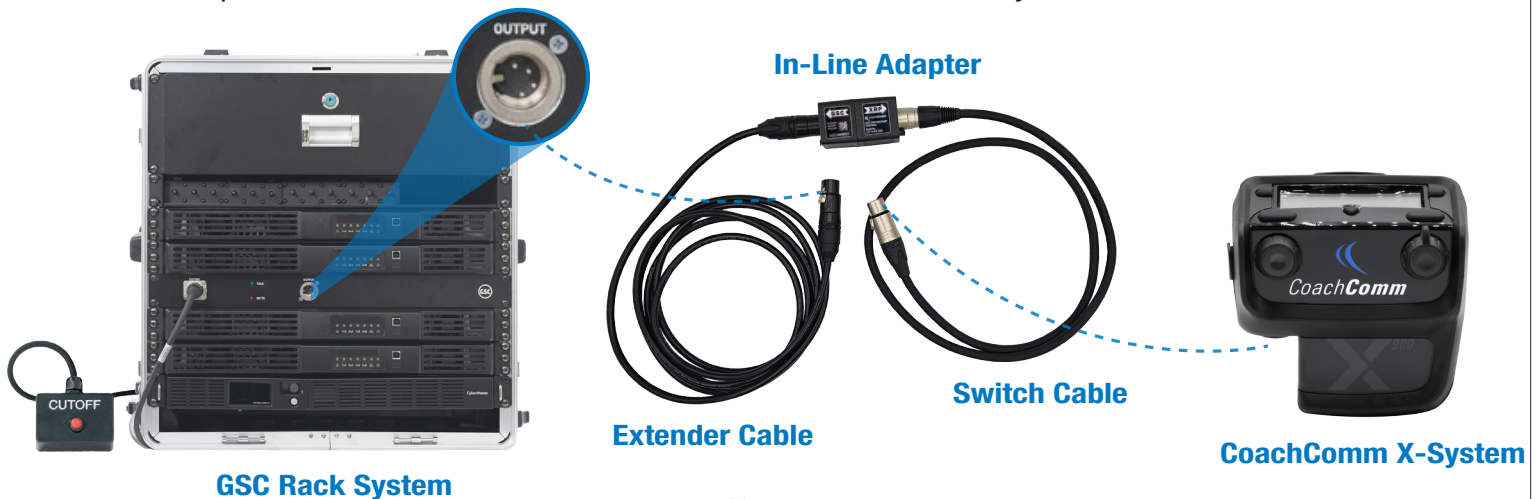


Diagram 5

X2 Visiting a Cobalt Plus Team

The same as Diagram 1, but with X2 as the Visiting Team.

Test Cutoff Switch

After following the previous steps and powering on both systems, the X-System Radio Pack's primary screen will show ACTIVE.



Note: X-System RP must be using a Referee profile.

Verify that when pressing the cutoff switch, the X-System Radio Pack shows Muted. Make sure all cutoff packs have clear line-of-sight from the pressbox to the field and are separated by at least 3 feet or the length the cabling allows.



If your X-System Radio Pack displays Switch Not Connected, check that the switch is properly plugged in and all cable connections to the pack are securely connected.



When not logged in, the X-System Radio Pack will show Offline.



Contact Information

If you have any additional questions regarding these recommendations or CoachComm products, contact CoachComm Support specialists at 1.800.749.2761 or support@coachcomm.com.

CoachComm, LLC
205 Technology Parkway
Auburn, AL 36830
www.coachcomm.com
1.800.749.2761

Copyright © 2026 CoachComm LLC. All rights reserved. The SmartBoom® logo, CoachComm Cobalt®, and the CoachComm X-System® word mark are registered trademarks of CoachComm LLC. Any and all other trademark references within this document are property of their respective owners.
Document Reference: D0000780_A