

Getting Started

This Game Day Guide is a basic reference for setting up your X-System. For complete operation instructions, see the *X-System Operating Manual*, which is available on CoachComm's website at: www.coachcomm.com/x-system.

CAUTION: Allow only responsible, authorized individuals who have read all of the instructions and warnings to set up and operate your X-System.

X2 Package Overview




**Spare lithium batteries are not allowed in checked airline baggage. Be sure to follow all air travel rules and regulations when traveling with your X-System.*

1 Set up Press Box Rack Unit.

- 1a. Unpack the press box and accessory cases.
- 1b. Position the Press Box Rack Unit out of the way to avoid coaches and other traffic.
- 1c. Connect power to the Press Box Rack Unit, but do NOT turn on the Control Unit (CU) yet. The "Power" LED on the front of the Wired Interface should be lit green.

Important: X-System requires a minimum of one dedicated 15 amp 120V circuit.




(1c.) Power LED


2 Mount and connect the Antenna.

- 2a. Using either the clamp or suction cup mounting hardware, secure the antenna bracket so that the antenna's logo points toward the center of your team's coaches' box.

Note: Any obstructions between the antenna and field (like window tinting) can negatively impact performance. CoachComm recommends opening windows or mounting the antenna externally to the press box. We also recommend covering antennas with a clear plastic bag or a rain cover in the event that rain is expected.

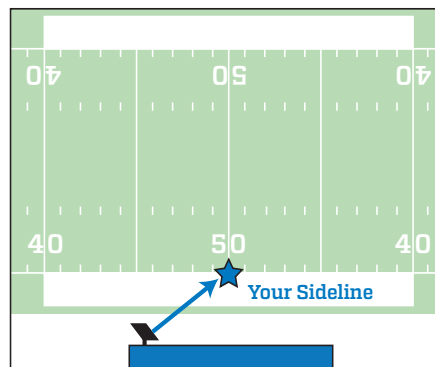


OR

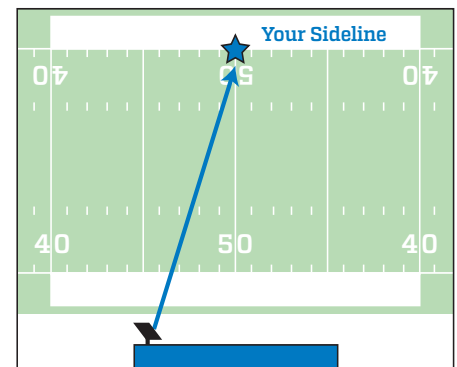

- 2b. Connect a Cat 5 cable to the X-NET IN port on the antenna.
- 2c. Connect the other end of the Cat 5 cable to the FIELD ANTENNA port on the Press Box Rack Unit's rear panel.
- 2d. If using a second field antenna, confirm the short Cat 5 cable is properly connected between the first antenna's RT LOOP port and the second antenna's X-NET IN port.

Note: If applicable, a third antenna for booth wireless can be connected as outlined in the diagram below.

CAUTION: Secure and protect any cords to prevent walkway hazards and potential contact with moisture.

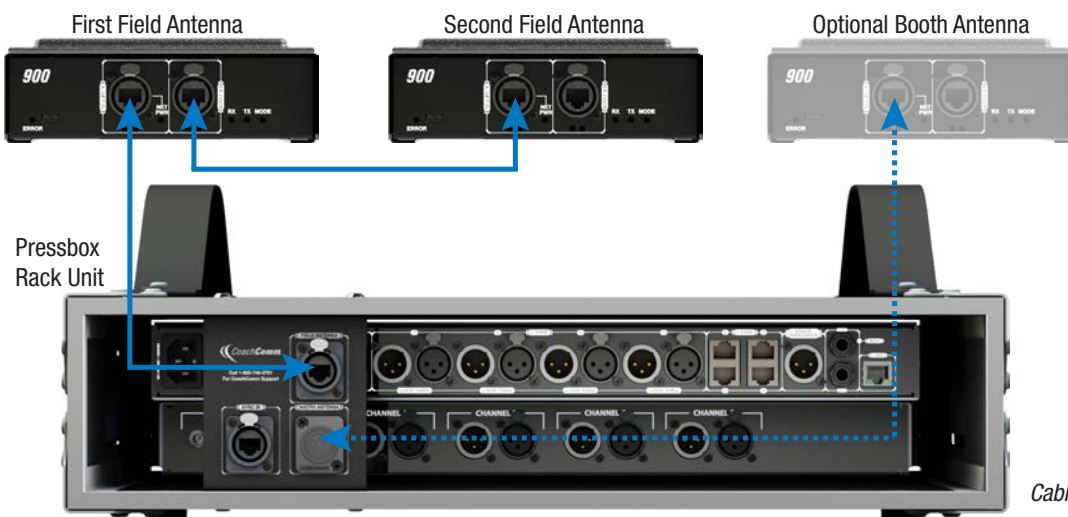

Cables not shown

3 Power on the Control Unit.

- 3a. Power ON the CU via the power switch on its front panel.
- 3b. Use CU navigational controls to select **Home** or **Away** and press the Enter button.

Important: No RF transmission will occur until the Home/Away status is selected. Failure to set this status properly may result in RF interference if and when the opposing team is also using an X-System. It is important to coordinate with opponents to ensure optimal performance for both teams.



(3b.) CU Navigation Buttons

- 3c. Wait until the CU displays the following message: “CCF Loaded” along with a configuration file summary. Once the message times out, the home screen will display on the front of the CU.

CCF Loaded			
Version: 3	Flags: 02	Length: 3,936	Number of Devices: 3
Device Connection: 2	Control Unit: 1	Expansion: 0	Hub: 0
Radio Transceiver: 2	Radio Pack: 12	Radio Pack Profile: 12	
Conference: 4	Relay Assignment: 0	Aux Audio Assignment: 0	
User Info Record: 0	Access Rights: 0	UI Data: 0	


(3c.) Sample CCF Loaded Screen

4 Set up the Wired Interface and Wired BeltPacks.

The procedures in this step should be performed with at least two people.

- 4a. Place a Wired BeltPack at each coach’s position in the press box.
- 4b. Connect the short end of the Cat 5 cable bundle to the desired channels on front of the Wired Interface (A/B or C/D).
- 4c. Connect the opposite ends of the bundled cables to each Wired BeltPack.

Important: Keep cables out of the way of coaches and heavy foot traffic. Cables that are pinched, snagged, or damaged will cause disrupted communication.

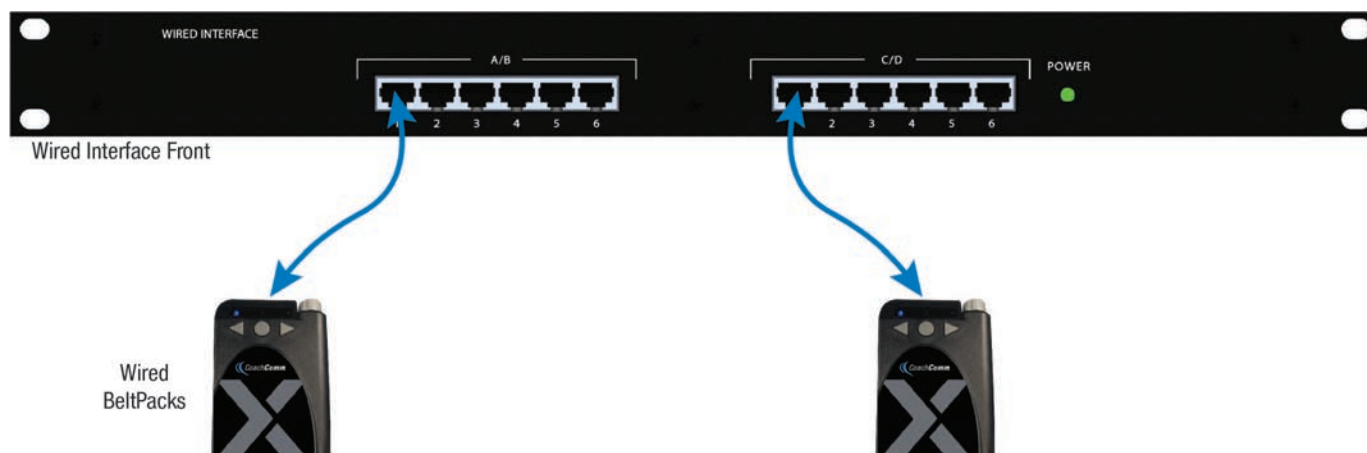

- 4d. Connect a headset to each Wired BeltPack.
- 4e. Power on each Wired BeltPack by turning the volume knob clockwise. The lights on the front of the BeltPack will illuminate when powered on. Confirm that each Talk button is off.
- 4f. Put on one headset and press the Talk button on the Wired BeltPack and confirm that you can communicate with a second Wired BeltPack on both channels with no crosstalk. Repeat the test for each Wired BeltPack.

5 Power on and walk test Radio Packs.



(5b.) Turn on by holding Power button for 3 seconds.

(5a.) Install battery.

(5c.) Check LQ.



The procedures in this step should be performed with at least two people.

- 5a. On the sideline, unpack the sideline case and install one of the provided, fully charged Lithium-Polymer rechargeable batteries or three AA batteries in each Radio Pack (RP).
- 5b. Power on the first two RPs by pressing and holding the Power button on the back of the RP for 3 seconds.
- 5c. Confirm each RP is on the same conference, connect a headset to each RP, and conduct a walk test to confirm their operation. The RP's LQ value can be used to gauge performance. See the *X-System Operating Manual* for more information about LQ values.

Important: Each tester should walk their Wireless RPs to opposite goal lines and back, ensuring clear communication between all Wireless RPs. Always place the Wireless RP on the hip opposite from the press box when walk testing.

- 5d. After walk testing is complete, place the RP down on a table or bench. Be sure to place each RP a foot or so apart; bunching RPs together could impact wireless performance. Repeat steps 5b-5c for each of the remaining RPs.

Important: If raining, cover the RPs or return them to their cases.

- 5e. Confirm communication between wireless and wired coaches.

6 Power off and stow away.

Once your game has ended, power off and properly stow away all components:

- 6a. Power off all RPs and stow them with the field headsets in the sideline case.
- 6b. Power off and disconnect all Wired BeltPacks and stow them in the press box case.
- 6c. Power off the CU and disconnect the Cat 5 cable between the Press Box Rack Unit and the antennas. Carefully disassemble and stow the antennas and mounting hardware in the appropriate case.
- 6d. Coil all cables and stow them with the press box headsets in the accessory case.
- 6e. Disconnect power from the Press Box Rack Unit and stow it in the press box case.

Important: Thoroughly dry off any moisture prior to storage. Failure to do so can cause components to corrode and damage.



205 Technology Parkway
Auburn, Alabama 36830

www.coachcomm.com
Phone 1.800.749.2761

Fax 1.888.329.2658

While CoachComm makes every attempt to maintain the accuracy of the information contained in this document, this information is subject to change without notice. Please check our website for the latest system specifications and certifications. Copyright © 2018 CoachComm LLC. All rights reserved. The X-System logo is a trademark of CoachComm LLC. All other trademarks are property of their respective owners. Document Reference: 2018.02 D0000384_A