

SYSTEM OVERVIEW



Specifications


Battery Life: 10 hours

LED Modes: Blue (Double Blink) = Logged In
 Blue (Single Blink) = Logged Out
 Red = Low Battery

SETUP AND OPERATION

1 Connect a headset to the beltpack.

For best performance, always wear the headset mic directly in front of your mouth, about a finger's width from your lips.

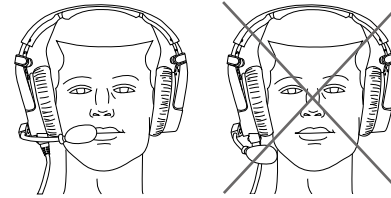


2 Power on the beltpack.

Hold down the power button for 3 seconds, until the screen turns on.

3 Select Home (H) if you are the home team or Away (A) if you are the visiting team.

Use the volume buttons to toggle between the options. Press and hold mode to make your selection.



This setting provides proper wireless coordination between two CoachComm Cobalt teams.

4 Adjust beltpack volume as needed with the volume buttons.




5 Maintain optimal line of sight with other beltpacks.

The "h0" pack is the master and is required for all packs to work. For best system performance, use the master on the sideline near other packs.



6 Press the logo button to toggle its assigned function.

Packs whose IDs are **h0-h4** use this button to switch channels, and talk is always on.

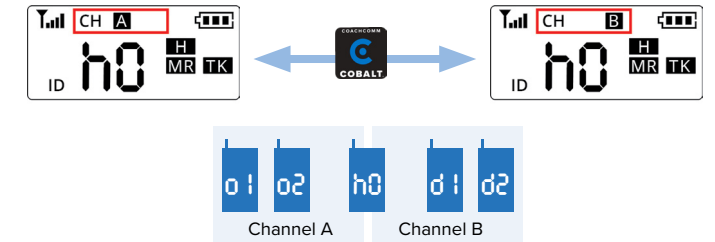

Packs whose IDs are **o1-o4** talk on channel A and use this button to switch talk on/off. Packs whose IDs are **d1-d4** talk on channel B and use this button to switch talk on/off. (Note: Packs whose IDs end in "r" are listen-only.)



7 After The Game

Power off all beltpacks (hold down the power button). Thoroughly dry off any moisture. Properly stow away all gear in your case.

Be sure to fully charge your beltpacks after each use. (Charge time: 3.5 hours from dead.) When charging, LED is red. When charge complete, LED is off.

Scan this QR Code with your mobile device to access our website and view more support information for CoachComm Cobalt.



Copyright © 2019 CoachComm, LLC. All rights reserved. CoachComm Cobalt™ is a trademark of CoachComm, LLC. D0000479_B.