

SETUP

Power on Cobalt Plus System

- 1. Power on.** Press and hold the POWER button on the Master backpack for three (3) seconds, until the screen turns on.
- 2. On the Master backpack, select Home if you are the home team or Away if you are the visiting team.** Use the + and – buttons to toggle between the options. (Selected option will blink.) Press and hold the MODE button to save your selection. This setting provides proper wireless coordination for your other backpacks and between your team and another CoachComm Cobalt, Cobalt PLUS, or X-System team.

Note: To learn more about configuring your system for player communications, please contact CoachComm Customer Support or watch the instructional video on the Cobalt Plus Support webpage.

Assemble Parts and Power On

- 1. Connect battery to player receiver.** Connect the red connector on the battery to the red connector on the player receiver. Make sure that it is fully inserted.
- 2. Attach speaker assembly.** Connect the black connector on the speaker assembly to the blue speaker connector on the player receiver. Check the speaker assembly is snapped into place and is securely connected to the helmet receiver.
- 3. Power On/Off:** Press and hold the power button for 4 seconds.

Note: Charge the battery after each use. Disconnect battery if storing for more than a week.

- 4. Attach velcro to receiver components.** Attach the "hook" side of the velcro onto the player receiver components on the side with no label, and attach the "loop" side of the velcro to the helmet.

Note: The rectangle velcro should be attached to the player receiver and battery on the non-label side. The circle velcro should be attached to the speakers on the side without speaker holes.

Determine Placement of Components

- 1. Adjust volume to a low setting.** Before installing the player receiver and speaker assembly in a helmet, turn the volume to a low setting using the arrows.

WARNING: HEARING LOSS HAZARD. To prevent possible permanent hearing loss, ALWAYS set the volume as low as possible depending on the ambient noise at practice or at a game.

- DO NOT use CoachComm Cobalt Plus Player Receiver if it emits any unusual loud noise. Turn module off by disconnecting the battery and contact CoachComm Customer Service.
- Permanent hearing loss may result from exposure to high volumes or other loud noises.

- 2. Follow the recommendations of the helmet manufacturer for the specific model helmet.**

WARNING: To prevent SERIOUS INJURY or DEATH, ALWAYS contact the helmet manufacturer for the approved device placement locations for the Helmet Receiver and its accessories. These may vary between helmet models and between helmet manufacturers.



- ONLY use with NOCSAE compliant helmets.
- ONLY use attachments or accessories specifically made for or approved by CoachComm.
- ALWAYS refer all player receiver service to qualified CoachComm service personnel. There are no user serviceable parts inside the CoachComm Cobalt Plus Player Receiver.

OPERATION

See the newest version of the Cobalt Plus Manual for information on Coaches' communication with CoachComm Cobalt Plus Player Receiver.

- Change Channel:** Press and hold mode for approximately 4 seconds to enter the channel select menu. While listening to voice prompts, use the up and down arrows to navigate to the desired channel. To save channel, press and hold mode for approximately 4 seconds.

Note: Speakers must be connected to hear menu setting changes.

- Lock/Unlock Receiver:** Press and hold Mode + Down Arrow for 4 seconds. Voice prompt will say "Receiver Locked" or "Receiver Unlocked."

Charging

- Connect battery to player receiver. Connect charging cable via USB on player receiver.
- Ensure the battery has been fully charged. Status LED will be OFF at full power.

Battery

- Battery life: Approx. 6 hours
- Charge time from empty: Approx. 4 hours
- Sleep Mode: To preserve battery life, the player receiver automatically goes into a sleep/low-power mode after approximately five (5) minutes of inactivity if it does not detect movement and is not logged in to a system to conserve battery power. To wake, shake the player receiver for three seconds until it wakes (the power LED lights red and blue simultaneously).

The device temperature will increase due to normal charging. As a lithium-polymer battery safety mechanism, charging will stop if the device is too hot (over 113°F). CoachComm recommends charging devices in a cool environment.

LEDs

Operation	LED Indicators
Power On and Scanning	Status LED : Blink once per second Power LED : RED/BLUE both lit (appears purple)
Synced to enable communication	Status LED : Blinks twice every 2 seconds Power LED : RED/BLUE both lit (appears purple)
Sleep Mode	Status LED : OFF Power LED : OFF
Battery charging	Status LED : RED ON
Battery fully charged	Status LED : RED OFF

CUSTOMER SUPPORT

CoachComm offers technical support via phone and email from 8:00 a.m. to 5:00 p.m. (Central Time), Monday through Friday. After hours support available with applicable support plans.

+1.800.749.2761
customer.service@coachcomm.com

Visit <https://www.coachcomm.com/support> for product support references and helpful documentation.

Additional Documentation

This is a quick start guide. For additional details on menu settings, device specifications, and product warranty, refer to the full Cobalt Plus Manual on our website listed above.

WARNINGS

Go to www.coachcomm.com/cobaltplus-player or scan the QR code below to view additional information for the use of CoachComm Cobalt Plus Player Receiver.




IN THIS BOX

WHAT'S INCLUDED WITH COACHCOMM COBALT PLUS PLAYER RECEIVER?

- CoachComm Cobalt Plus Player Receiver
- Quick Start Guide
- Rechargeable Battery
- Speaker Assembly
- Charging Kit
- Zippered Storage Pouch
- Velcro

QUICK START GUIDE

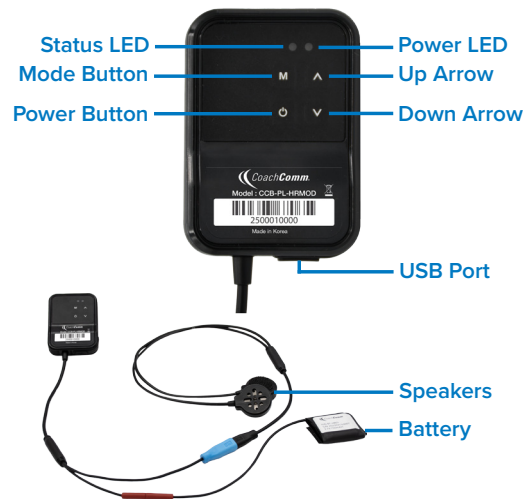

Copyright © 2025 CoachComm LLC. All rights reserved. CoachComm Cobalt® is a trademark of CoachComm, LLC. All other trademarks are property of their respective owners.

Document Reference: D0000793_A

For more information visit
www.coachcomm.com